



Dow Corning® 102F Additive for Highly Efficient Foam Control in Solventborne Paints and Inks

No Noticeable Impact on Surface Appearance or Recoatability



Power Up
YOUR COATINGS

Outperforms Currently Available Products

Foam generation can cause problems with the production, filling and application of solvent-based paints, inks and coatings, particularly in high-solids formulations.

If you are seeing more defects and haze and gloss issues resulting from the addition of your foam control agents – and if you have to use several different additives to control foam in your solventborne coatings – consider *Dow Corning® 102F Additive*.

Available globally, *Dow Corning 102F Additive* is a highly efficient fluorosilicone defoaming agent with a level of performance that exceeds what is possible with other fluorosilicone-based products available today.

Effective at Very Low Use Levels

The low surface tension of *Dow Corning 102F Additive* makes it a very efficient antifoam and defoamer. Because it performs at very low concentrations, you can achieve effective foam control at very low silicone addition levels, even in high-solids formulations. Consequently, *Dow Corning 102F Additive* does not noticeably impact the surface appearance or recoatability of the applied film.

While the amount required is formulation-dependent, the typical addition level for *Dow Corning 102F Additive* is up to 0.7 percent by weight (equivalent to 50 ppm fluorosilicone).

Clear and colorless, *Dow Corning 102F Additive* does not impact the clarity of the coating. It has good compatibility with solventborne coating systems and a low tendency to cause craters. Additionally, it can be added in the let-down stage without tending to cause surface defects.

Cost-Effective and Versatile

In applications where strong antifoaming is required – such as protective coatings, wood coatings and flooring coatings – *Dow Corning 102F Additive* provides high defoaming performance in a cost-effective manner. Plus, it is suitable for multiple formulations, so you can achieve synergies across your manufacturing operations and supply chain.


Advantages of Dow Corning® 102F Additive:

- High-efficiency defoaming in solventborne systems
- Effective at very low use levels, even in high-solids formulations
- Does not noticeably impact surface appearance or recoatability
- Easy to use

Highly Effective Foam-Control Performance

Figure 1: Paint density


High-speed stirring test of a solventborne 2K PU wood coating with Dow Corning 102F Additive at 0.2 wt%, as supplied

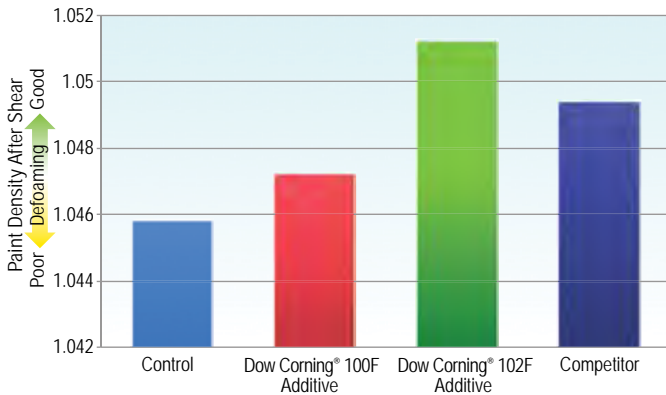

Measurement of paint density after high-speed stirring indicates that the antifoam performance of Dow Corning 102F Additive is superior to that of the competitor's product.


Figure 2: Surface appearance

High-speed stirring test of an industrial coating (epoxy protective base coat) with Dow Corning 102F Additive at 0.4 wt%, as supplied

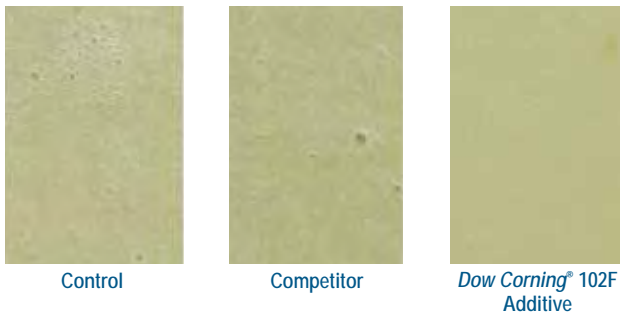

The presence of fewer bubbles on the surface of the coating after high-speed mixing and subsequent curing indicates that Dow Corning 102F Additive provides more effective foam control than the competitor's product.

Figure 3: Differentiated performance

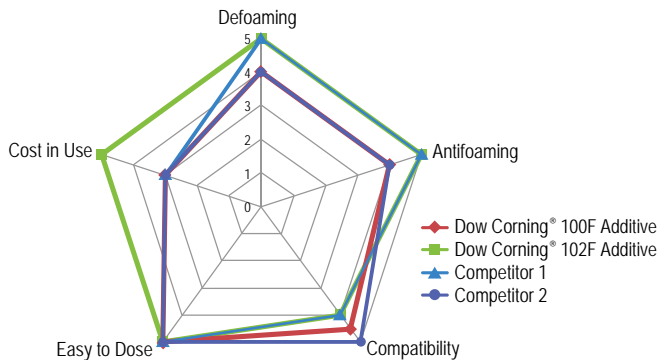

More Than Foam Control

Our innovative, silicon-based enabling technologies can help you infuse your products with high-value performance attributes that can give you a competitive advantage in the marketplace. As a leader and innovator with a long history of success in the industry, Dow Corning's performance-enhancing coating technology platforms are well-aligned to the needs of the increasingly competitive global coatings market.

For More Information

To learn how Dow Corning's innovative coatings technology platforms can help you power up your product line, visit dowcorning.com/powerup or email us at coatings@dowcorning.com.

Photo: AV23484

HANDLING PRECAUTIONS

PRODUCT SAFETY INFORMATION REQUIRED FOR SAFE USE IS NOT INCLUDED IN THIS DOCUMENT. BEFORE HANDLING, READ PRODUCT AND MATERIAL SAFETY DATA SHEETS AND CONTAINER LABELS FOR SAFE USE, PHYSICAL AND HEALTH HAZARD INFORMATION. THE MATERIAL SAFETY DATA SHEET IS AVAILABLE ON THE DOW CORNING WEBSITE AT DOWCORNING.COM, OR FROM YOUR DOW CORNING SALES APPLICATION ENGINEER, OR DISTRIBUTOR, OR BY CALLING DOW CORNING CUSTOMER SERVICE.

LIMITED WARRANTY INFORMATION – PLEASE READ CAREFULLY

The information contained herein is offered in good faith and is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information should not be used in substitution for customer's tests to ensure that our products are safe, effective and fully satisfactory for the intended end use. Suggestions of use shall not be taken as inducements to infringe any patent.

Dow Corning's sole warranty is that our products will meet the sales specifications in effect at the time of shipment.

Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted.

TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAW, DOW CORNING SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY.

DOW CORNING DISCLAIMS LIABILITY FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES.

Dow Corning is a registered trademark of Dow Corning Corporation.

We help you invent the future is a trademark of Dow Corning Corporation.

©2015 Dow Corning Corporation. All rights reserved.

Printed in USA

AGP13904

Form No. 26-2094-01

DOW CORNING

We help you invent the future.™