



DOW CORNING

Coatings Additive Solutions

Dow Corning® 210S Additive for waterborne wood coatings

Optimal compatibility for improving mar/abrasion resistance and anti-blocking performance



Maximize your wood coating advantages

- Cost-effective and customizable slip
- Enhanced mar/abrasion resistance and anti-blocking performance
- No impact on mechanical properties
- Good compatibility with modern binders
- No impact on surface hardness or water resistance
- Easy to dose and incorporate

Achieve class-leading wood coating formulations

Dow Corning® 210S Additive offers the improved mar/abrasion resistance and anti-blocking performance of our established additives while enhancing compatibility with modern waterborne wood coating binders. The compatibility improvement results in a reduced tendency for cratering and – depending on the binder system – less impact on gloss. These benefits enable you to extend the range of formulations where class-leading mar/abrasion/scratch resistance, slip and anti-blocking properties can be achieved.

Additionally, Dow Corning® 210S Additive may be used alone or in combination with wax additives.

Cost-effective performance enhancement

Dow Corning® 210S Additive is a third-generation version of our unique ultrahigh-molecular-weight silicone dispersion technology, which provides strong reduction in static and dynamic coefficient of friction at very low use levels.

This superior surface activity improves mar/abrasion resistance in typical wood coating formulations. Dow Corning® 210S Additive also has shown utility in the very challenging area of achieving blocking resistance in modern waterborne wood coatings.



Fewer side effects

Formulators often worry about the side effects of additives, especially silicone-based materials. Dow's silicone additive portfolio, however, is based on paint-friendly silicone materials, and *Dow Corning*[®] 210S Additive is optimized to provide:

- **No impact** on mechanical properties
- **No impact** on surface hardness
- **No impact** on water resistance

Figure 1. Compatibility: Waterborne Coating Binder at 0.4 wt. % Active Level

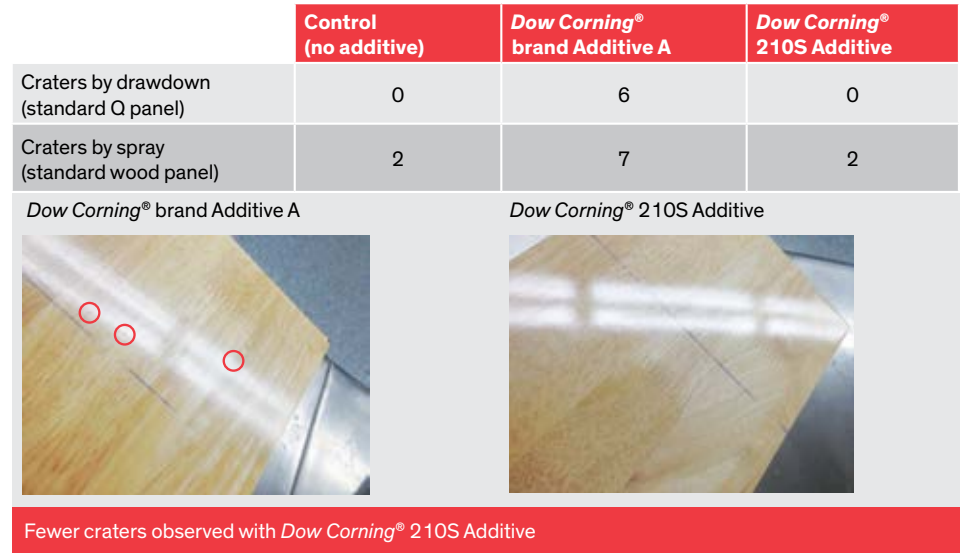


Figure 2. Kinetic Coefficient of Friction: Clear Waterborne Acrylic Wood Coating

Test Conditions: Nylon probe; normal force = 700 g; probe speed = 2 mm/s; formulation = ROSHIELD[™] 3188 Acrylic Emulsion


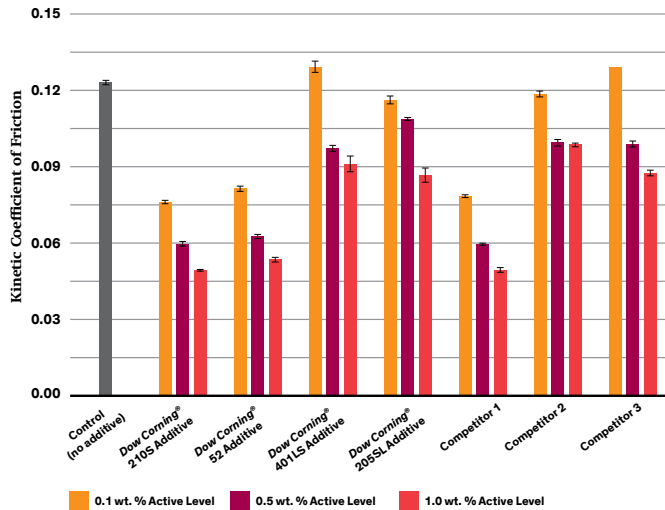


Figure 3. Mar Resistance: Clear Waterborne Acrylic Wood Coating

Test Conditions: Test method = ASTM D5178; formulation = ROSHIELD[™] 3188 Acrylic Emulsion

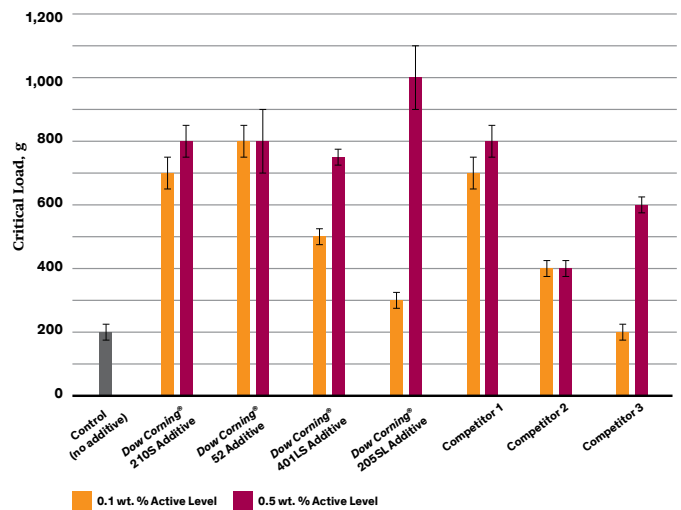

For technical information and samples

For a technical data sheet and to order a sample of *Dow Corning*[®] 210S Additive to test in your formulation, visit dowcorning.com/powerup or email us at coatings@dowcorning.com.

Image: dow_42699680574

HANDLING PRECAUTIONS

PRODUCT SAFETY INFORMATION REQUIRED FOR SAFE USE IS NOT INCLUDED IN THIS DOCUMENT. BEFORE HANDLING, READ PRODUCT AND SAFETY DATA SHEETS AND CONTAINER LABELS FOR SAFE USE, PHYSICAL AND HEALTH HAZARD INFORMATION. THE SAFETY DATA SHEET IS AVAILABLE ON THE DOW WEBSITE AT WWW.DOWCORNING.COM, OR FROM YOUR DOW SALES APPLICATION ENGINEER, OR DISTRIBUTOR, OR BY CALLING DOW CUSTOMER SERVICE.

LIMITED WARRANTY INFORMATION – PLEASE READ CAREFULLY

The information contained herein is offered in good faith and is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information should not be used in substitution for customer's tests to ensure that our products are safe, effective and fully satisfactory for the intended end use. Suggestions of use shall not be taken as inducements to infringe any patent.

Dow's sole warranty is that our products will meet the sales specifications in effect at the time of shipment.

Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted.

TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAW, DOW SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY.

DOW DISCLAIMS LIABILITY FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES.

©[™] Trademark of The Dow Chemical Company ("Dow") or an affiliated company of Dow. The Corning portion of the Dow Corning trademark is a trademark of Corning Incorporated, used under license. © 2017 The Dow Chemical Company. All rights reserved.